





STR Int
STR Integrated Amplifier
Anthem
0004A39386CC





Mon December 18 2023

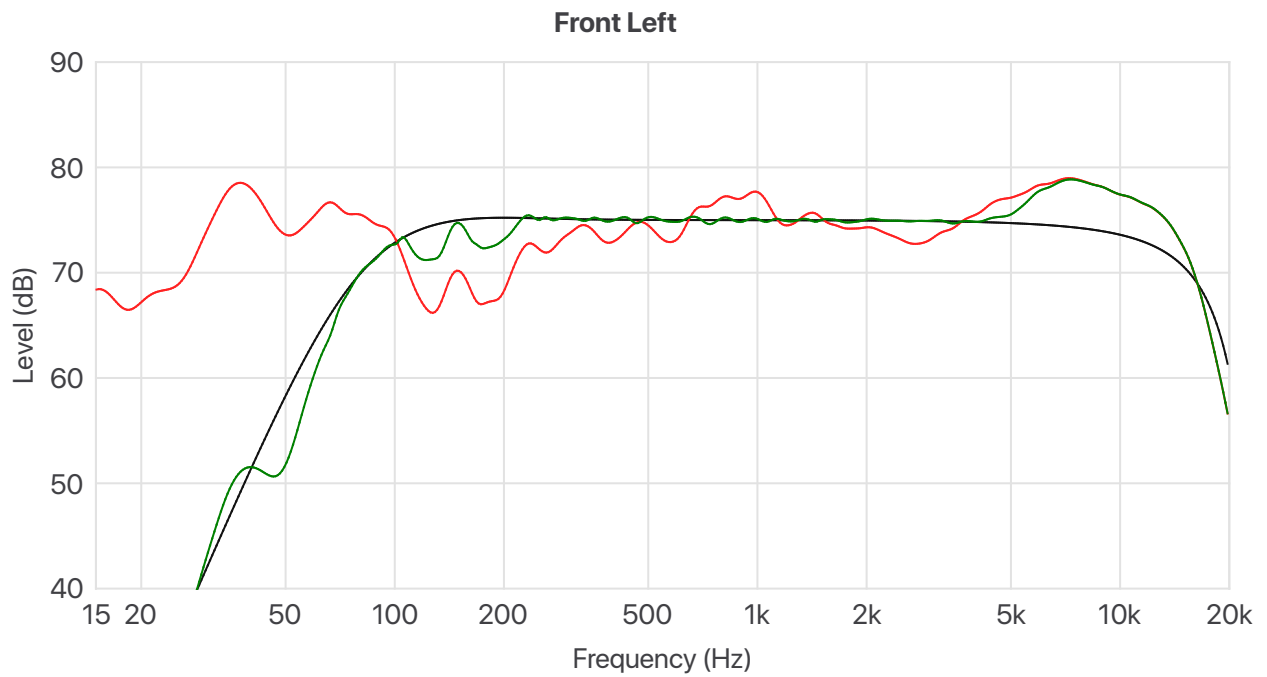

● Target Curve ● Measurement Curve ● Corrected Curve

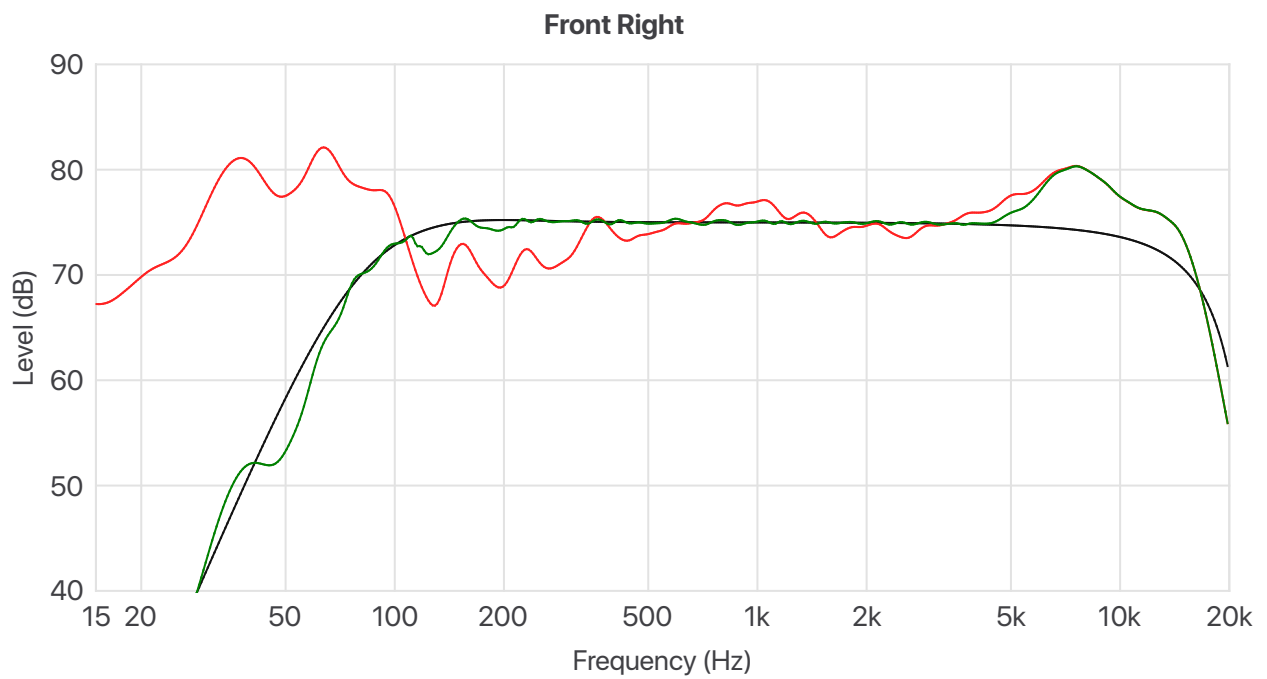

● Target Curve ● Measurement Curve ● Corrected Curve

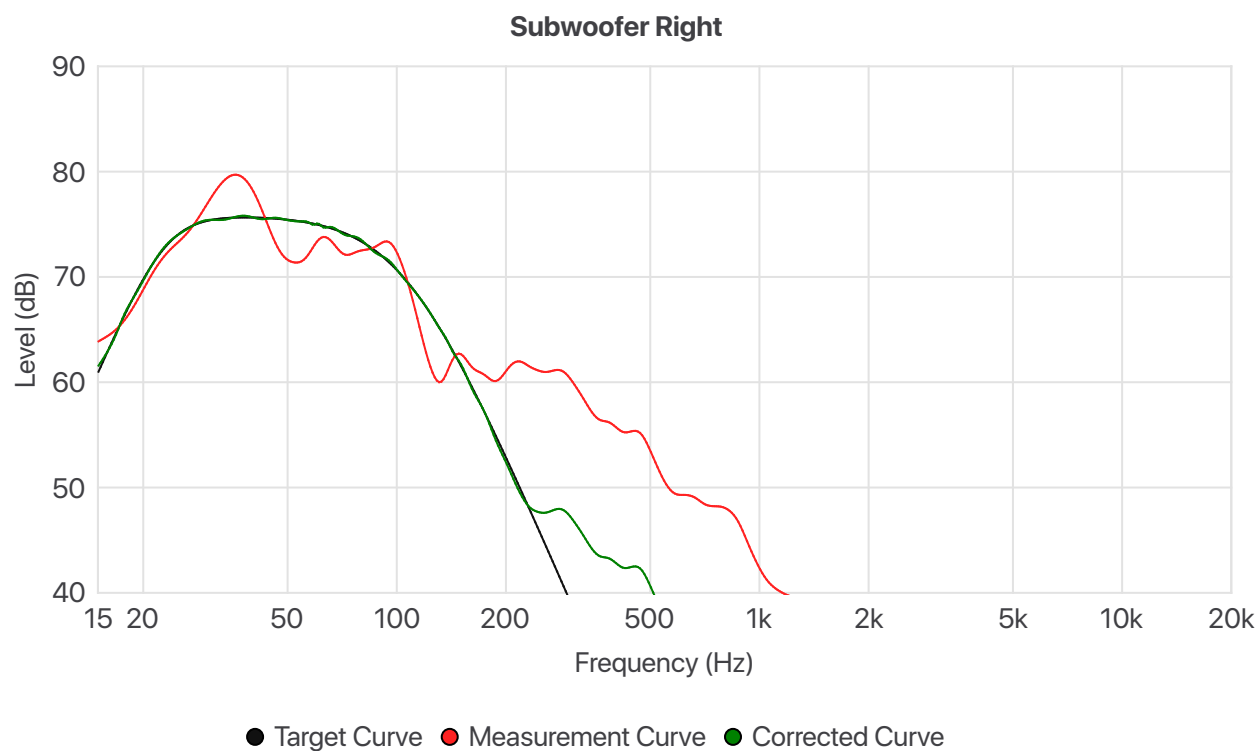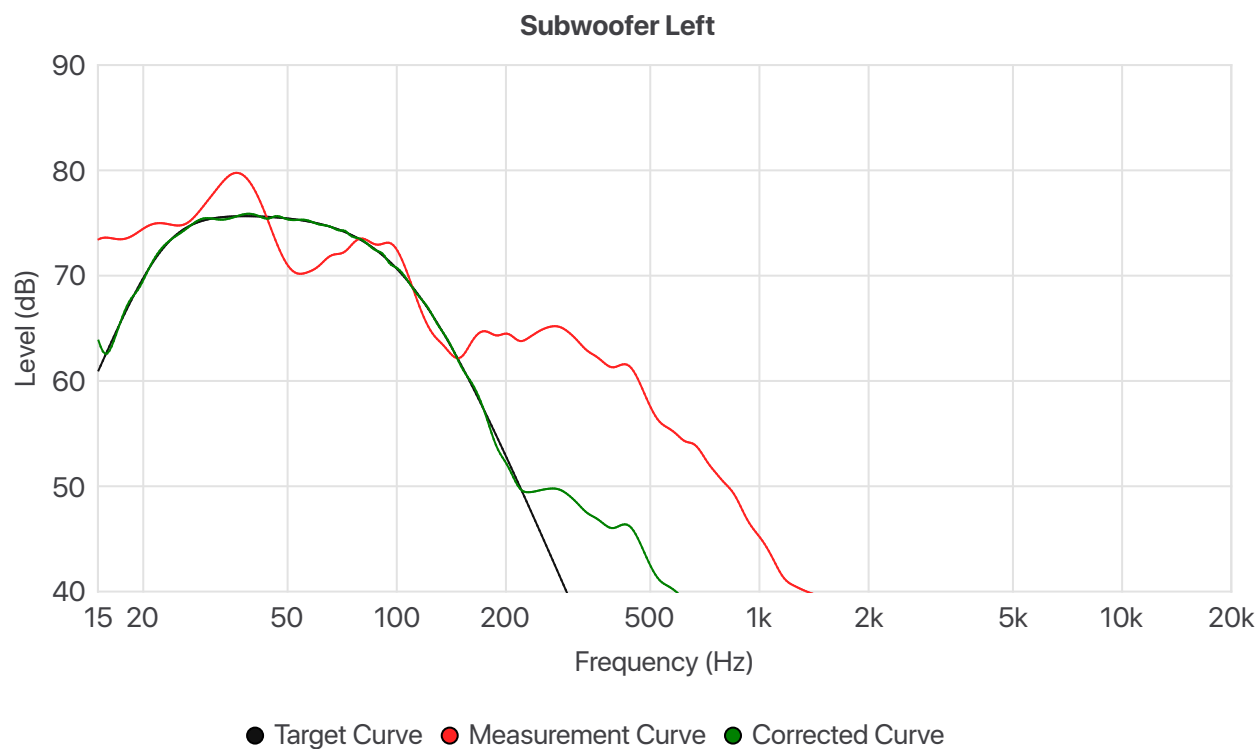

Speaker Profile Settings

Profile1 uses Measurement A

List of Speakers Enabled

Profile1:

- Fronts
- Subwoofer(s)

Level Settings

Profile1:

System-Wide Level Target: 0 dB

Front Left: 8 dB, 12' 2"

Front Right: 8.5 dB, 12' 4"

Subwoofer Left: 4.5 dB, 12' 4"

Subwoofer Right: 6 dB, 12' 10"

Target Settings

Profile1:

Room Gain: 0.875 dB

Room Gain Center Frequency: 200 Hz

Deep Bass Boost: 0 dB

Deep Bass Boost Center Frequency: 50 Hz

Tilt Level: 0 dB

Tilt Start Frequency: 100 Hz

FRONTS

Subwoofer Crossover Frequency (or Low-Frequency Extension): 80 Hz

Send Bass to Sub (or Low-Frequency Extension Slope): Send bass to the sub

High-Frequency Roll Off: 1.29

Maximum Correction Frequency: 5000 Hz

SUBWOOFER(S)

Subwoofer Crossover Frequency (or Low-Frequency Extension): 105 Hz

High-Pass Frequency: 23 Hz

High-Pass Slope: 4th

Minimum Correction Frequency: 19 Hz