


(21) Application No 7907115  
(22) Date of filing  
28 Feb 1979  
(23) Claims filed  
28 Feb 1979  
(30) Priority data  
(31) 53/102770  
(32) 25 Aug 1978  
(33) Japan (JP)  
(43) Application published  
12 Mar 1980  
(51) INT CL<sup>2</sup> H01B 7/00  
(52) Domestic classification  
H1A 3H  
(56) Documents cited  
GB 1490532  
GB 1174944  
GB 1171139  
GB 1088004  
GB 1025978  
(58) Field of search  
H1A  
(71) Applicant  
Shin Endo  
34-7 Soshigaya 5-  
chome

Setagaya-ku  
Tokyo  
Japan  
(72) Inventor  
Shin Endo  
(74) Agents  
Stevens Hewlett &  
Perkins

is said to be improved against deterioration of the frequency characteristic in the high-pass region and to have improved response characteristics and waveform reproducibility.

(54) Loudspeaker cable

(57) A cable suitable for connecting an amplifier to a loud speaker comprises a plurality of conductor strips e.g. 14, 15 braided together, to conductor strips each being formed from a plane parallel plurality of high-purity soft copper wires e.g. 0.18-0.20 mm diameter coated with an insulating film eg of polyurethane resin 0.0101-0.17 mm thick. A vinyl resin sheath 17 protects the cable, which may be braided into a flat shape. The cable

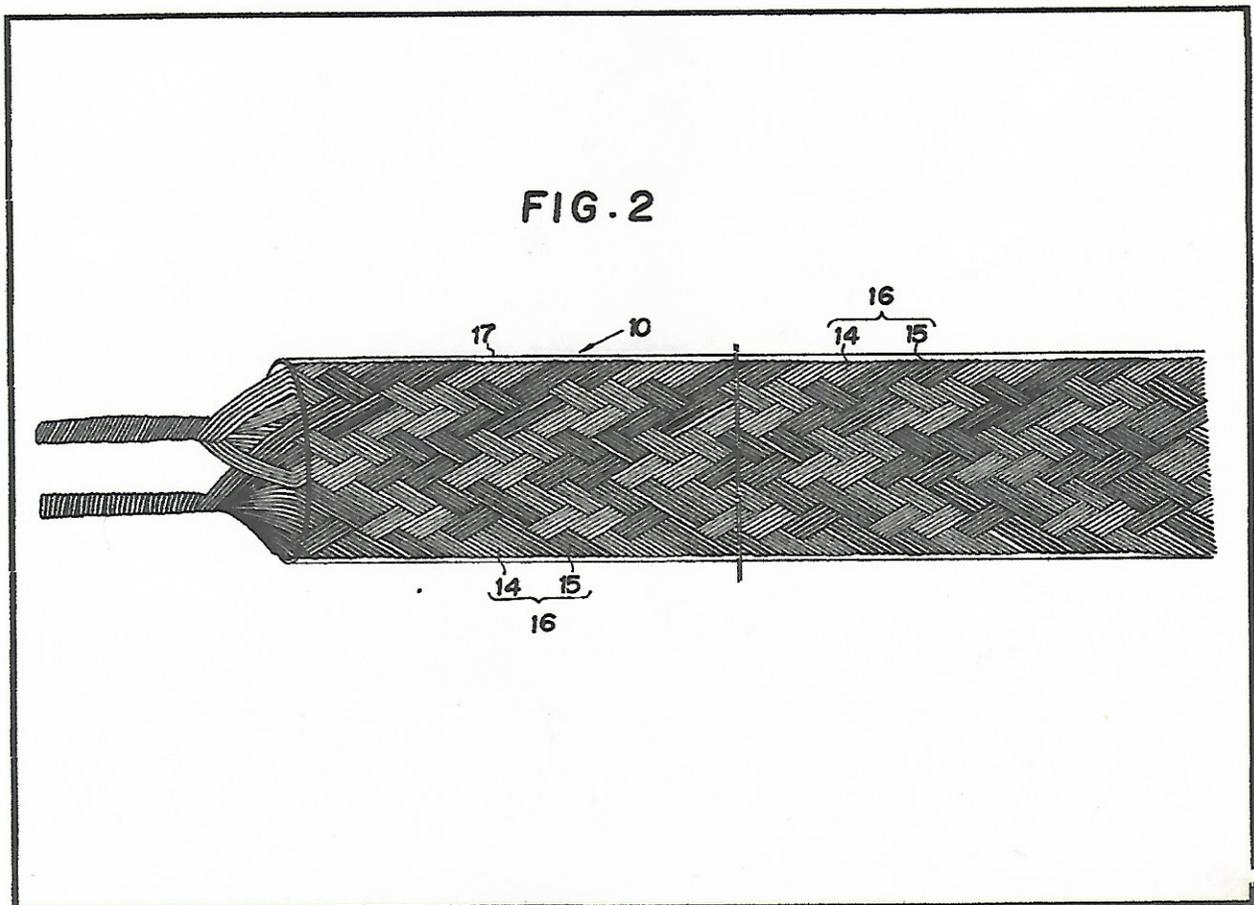

GB 2029079 A